




1407-10

SPIRAL SUCTION HOSE, SUPER ELASTIC PVC

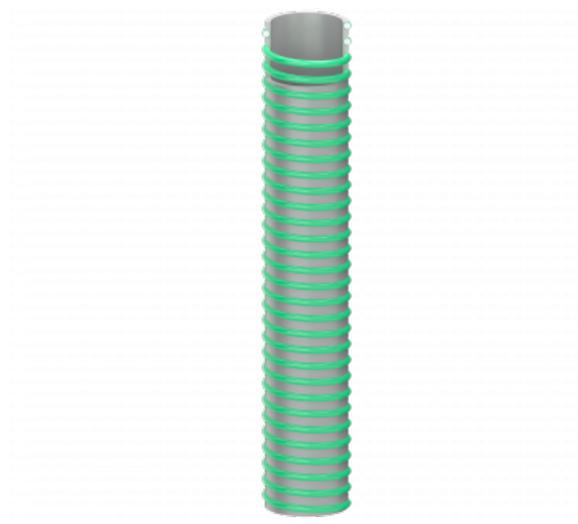

SPECIFICATIONS

Cover	PVC	Safety factor	1:3
Tube	PVC	Standard	NS 9416:2013
Reinforcement	PVC spiral	Temp min	-25 °C
Resistance cover	Weather	Temp max	55 °C
Design	Corrugated	Color	Green and grey
Media	Abrasive materials, Water		

DESCRIPTION

Suction hose for sewage trucks, grains and fertilizing. Pliable and flexible at low temperatures. The extra hard PVC spiral gives an extraordinary protection against external abrasion.

SKU	ID	OD	Wp	Vacuum, max	Bend radii [mm]	Coil lenght	Weight
14071016	25 mm	33.8 mm	0.7 MPa	90	100 mm	50 m	0.48 kg
14071020	32 mm	40.8 mm	0.6 MPa	90	130 mm	50 m	0.6 kg
14071024	38 mm	46.8 mm	0.6 MPa	90	150 mm	50 m	0.7 kg
14071032	50 mm	61 mm	0.5 MPa	90	200 mm	50 m	1.05 kg
14071040	63 mm	74 mm	0.45 MPa	90	250 mm	50 m	1.39 kg
14071048	76 mm	89 mm	0.4 MPa	90	300 mm	30 m	1.7 kg
14071051	80 mm	93 mm	0.35 MPa	90	320 mm	30 m	1.85 kg
14071056	89 mm	102.4 mm	0.35 MPa	90	360 mm	30 m	2.25 kg
14071064	102 mm	116.6 mm	0.35 MPa	90	400 mm	30 m	2.7 kg
14071069	110 mm	125 mm	0.35 MPa	90	440 mm	20 m	3.1 kg
14071077	120 mm	135.6 mm	0.25 MPa	90	480 mm	20 m	3.6 kg
14071080	127 mm	143.6 mm	0.25 MPa	90	510 mm	20 m	3.9 kg
14071096	152 mm	170 mm	0.2 MPa	90	610 mm	20 m	5 kg

SKU	ID	OD	Wp	Vacuum, max	Bend radii [mm]	Coil lenght	Weight
14071148	76 mm	89 mm	0.4 MPa	90	300 mm	50 m	1.7 kg
14071160	160 mm	180 mm	0.2 MPa	90	640 mm	20 m	5.6 kg
14071164	102 mm	116.6 mm	0.35 MPa	90	400 mm	50 m	2.7 kg
14071200	200 mm	226 mm	0.15 MPa	90	800 mm	10 m	9.5 kg
14071254	254 mm	283 mm	0.15 MPa	90	1000 mm	10 m	13.5 kg