




5558-22

FASTER SERIES VV

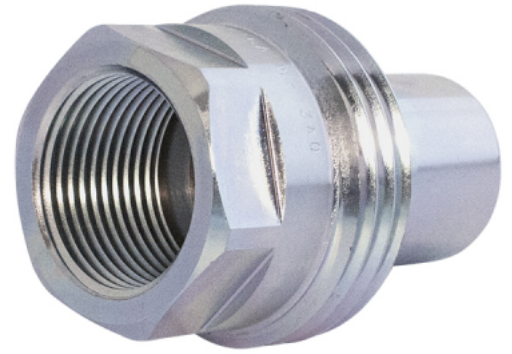

SPECIFICATIONS

Temp min	-25 °C
Temp max	125 °C
Safety factor	1:4
Valve type	Poppet

Connection 1 - Connect Mechanism	Screw_to_connect
Connection 1 - Connect under pressure	Allowed_residual
Connection 1 - Disconnect Mechanism	Uncrew_to_disconnect

DESCRIPTION

The Faster series VV is a quick connect coupling featuring a straight shape and a poppet valve type. It is designed with a MATE 500 Cr III surface coating for enhanced durability and operates safely within a temperature range of -25°C to 125°C. The coupling allows connection under residual pressure using a screw-to-connect and unscrew-to-disconnect mechanism, ensuring reliable and efficient performance.

Item number	Standard	Wp	Wp connected	Flow	Surface	Size 1	Size 2
55582204	FASTER serie VV	35 MPa	35 MPa	18 l/min	MATE 500 Cr III	1/4"	1/4"
55582206	FASTER serie VV	30 MPa	30 MPa	30 l/min	MATE 500 Cr III	3/8"	3/8"
55582208	FASTER serie VV	30 MPa	30 MPa	65 l/min	MATE 500 Cr III	1/2"	1/2"
55582212	FASTER serie VV	25 MPa	25 MPa	100 l/min	MATE 500 Cr III	3/4"	3/4"
55582216	FASTER serie VV	23 MPa	23 MPa	140 l/min	MATE 500 Cr III	1"	1"