


7745-xx

ADJUSTABLE L-FITTING ORFS – ORFS – UNF THREAD

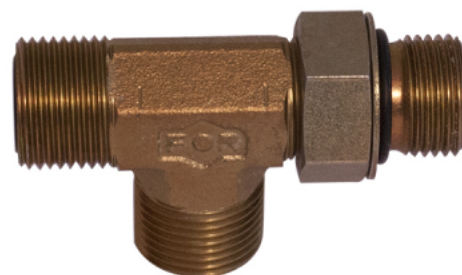

SPECIFICATIONS

Type 1	Male	Shape	L
Type 2	Male	Material	Steel
Type 3	Male	Standard	ISO 8434-3
Connection 3 - Sealing	O-ring		

DESCRIPTION

The Adjustable L-fitting ORFS features a durable steel construction and an adjustable design for versatile use. Part of the Coupling - Adapter ORFS and JIC family, it offers three male connections with O-ring sealing on the third, ensuring reliable and secure hydraulic connections with UNF threads. Its L-shaped coupling enhances installation flexibility.

Item number	Pipe dim. 1	Size 1	Pipe dim. 2	Size 2	Size 3	Wp	Weight
77450407	6 mm	UNF 9/16"-18 Male	6 mm	UNF 9/16"-18 Male	UNF 7/16"-20 Male	40 MPa	0.08 kg
77450409	6 mm	UNF 9/16"-18 Male	6 mm	UNF 9/16"-18 Male	UNF 9/16"-18 Male	40 MPa	0.09 kg
77450607	8, 10 mm	UN 11/16"-16 Male	8, 10 mm	UN 11/16"-16 Male	UNF 7/16"-20 Male	40 MPa	0.12 kg
77450609	8, 10 mm	UN 11/16"-16 Male	8, 10 mm	UN 11/16"-16 Male	UNF 9/16"-18 Male	40 MPa	0.13 kg
77450612	8, 10 mm	UN 11/16"-16 Male	8, 10 mm	UN 11/16"-16 Male	UNF 3/4"-16 Male	40 MPa	0.15 kg
77450809	12 mm	UN 13/16"-16 Male	12 mm	UN 13/16"-16 Male	UNF 9/16"-18 Male	40 MPa	0.14 kg
77450812	12 mm	UN 13/16"-16 Male	12 mm	UN 13/16"-16 Male	UNF 3/4"-16 Male	40 MPa	0.16 kg
77450817	12 mm	UN 13/16"-16 Male	12 mm	UN 13/16"-16 Male	UN 1 1/16"-12 Male	40 MPa	0.43 kg
77451014	14, 15, 16 mm	UNS 1"-14 Male	14, 15, 16 mm	UNS 1"-14 Male	UNF 7/8"-14 Male	40 MPa	0.3 kg
77451017	14, 15, 16 mm	UNS 1"-14 Male	14, 15, 16 mm	UNS 1"-14 Male	UN 1 1/16"-12 Male	40 MPa	0.37 kg
77451212	18, 20 mm	UN 1 3/16"-12 Male	18, 20 mm	UN 1 3/16"-12 Male	UNF 3/4"-16 Male	40 MPa	0.45 kg
77451217	18, 20 mm	UN 1 3/16"-12 Male	18, 20 mm	UN 1 3/16"-12 Male	UN 1 1/16"-12 Male	40 MPa	0.31 kg
77451621	22, 25 mm	UN 1 7/16"-12 Male	22, 25 mm	UN 1 7/16"-12 Male	UN 1 5/16"-12 Male	40 MPa	0.28 kg