


8031-xx

2-WAY BALL VALVE, G-THREADED, FEMALE STEEL

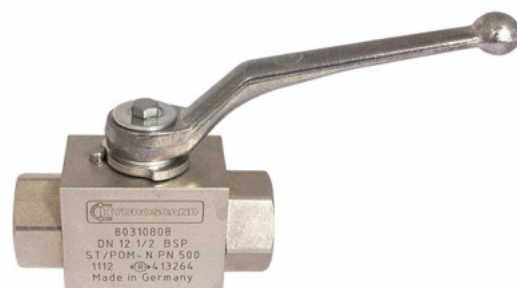

SPECIFICATIONS

Material	Steel	Temp min	-20 °C
Shape	Straight	Temp max	100 °C
Design	Valve	Type 1	Thread
Sealing	POM/NBR	Type 2	Thread

DESCRIPTION

This 2-way ball valve features a straight coupling design with female G-threaded steel connections on both ends. Constructed from durable steel and sealed with POM/NBR materials, it operates reliably within a temperature range of -20°C to 100°C.

Item number	DN size	Thread type 1	Size 1	Type 1	Thread type 2	Size 2	Type 2	Wp
80310202	4	G	1/8"	Female	G	1/8"	Female	50 MPa
80310404	6	G	1/4"	Female	G	1/4"	Female	50 MPa
80310606	10	G	3/8"	Female	G	3/8"	Female	50 MPa
80310808	12	G	1/2"	Female	G	1/2"	Female	50 MPa
80311212	20	G	3/4"	Female	G	3/4"	Female	40 MPa
80311616	25	G	1"	Female	G	1"	Female	40 MPa
80312020	32	G	1 1/4"	Female	G	1 1/4"	Female	40 MPa
80312424	40	G	1 1/2"	Female	G	1 1/2"	Female	40 MPa
80313232	50	G	2"	Female	G	2"	Female	40 MPa