




8034-xx

2-WAY BALL VALVE, SKS- CONNECTION STEEL

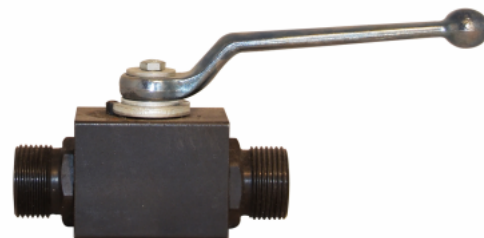

SPECIFICATIONS

Material	Steel	Temp min	-20 °C
Shape	Straight	Temp max	100 °C
Design	Valve	Type 1	Thread
Sealing	POM/NBR	Type 2	Thread

DESCRIPTION

The 2-way ball valve with SKS-connection is crafted from durable steel, featuring a straight coupling design with male threaded connections (M type) on both ends. Belonging to the Coupling - Valve family, this valve ensures reliable flow control with robust construction suitable for industrial applications.

Item number	DN size	Thread type 1	Size 1	Type 1	Thread type 2	Size 2	Type 2	Wp
80340816	4	M	16x1,5	Male	M	16x1,5	Male	50 MPa
80341018	6	M	18x1,5	Male	M	18x1,5	Male	50 MPa
80341220	8	M	20x1,5	Male	M	20x1,5	Male	50 MPa
80341624	12	M	24x1,5	Male	M	24x1,5	Male	50 MPa
80342030	16	M	30x2	Male	M	30x2	Male	40 MPa
80342536	20	M	36x2	Male	M	36x2	Male	40 MPa
80343042	25	M	42x2	Male	M	42x2	Male	40 MPa
80343852	32	M	52x2	Male	M	52x2	Male	40 MPa