




# 8090-xx

## 2-WAY BALL VALVE - BSP FEMALE, BRASS

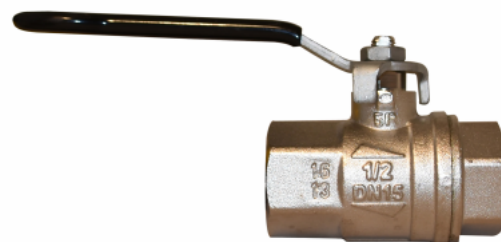

### SPECIFICATIONS

<b>Material</b>	Brass	<b>Temp min</b>	-40 °C
<b>Surface</b>	Nickel Plated	<b>Temp max</b>	170 °C
<b>Shape</b>	Straight	<b>Type 1</b>	Thread
<b>Design</b>	Valve	<b>Type 2</b>	Thread
<b>Sealing</b>	PTFE		

### DESCRIPTION

This 2-way ball valve features a straight coupling design with BSP female threaded connections on both ends. Crafted from durable brass with a nickel-plated surface, it ensures reliable performance and corrosion resistance. The valve sealing is made of PTFE, supporting a wide working temperature range from -40 to 170 Celsius, suitable for various industrial applications.

Item number	Thread type 1	Size 1	Type 1	Thread type 2	Size 2	Type 2	Wp
80900404	G	1/4"	Female	G	1/4"	Female	6.5 MPa
80900606	G	3/8"	Female	G	3/8"	Female	6.5 MPa
80900808	G	1/2"	Female	G	1/2"	Female	6.5 MPa
80901212	G	3/4"	Female	G	3/4"	Female	4 MPa
80901616	G	1"	Female	G	1"	Female	4 MPa
80902020	G	1 1/4"	Female	G	1 1/4"	Female	4 MPa
80902424	G	1 1/2"	Female	G	1 1/2"	Female	4 MPa
80903232	G	2"	Female	G	2"	Female	4 MPa
80904040	G	2 1/2"	Female	G	2 1/2"	Female	3 MPa
80904848	G	3"	Female	G	3"	Female	3 MPa
80906464	G	4"	Female	G	4"	Female	3 MPa